



AX-250 PLUS STRONG

THREE-PHASE 50HZ



Technical
service



Spare
parts



Financing up
to 100%



2 years
warranty*



If you have a moment, leave us a Google review. [Click aquí](#) to go to our page. Thank you!

AX-250 PLUS STRONG

MOTOR YTO YM6S4L-15 DIÉSEL

Main power rating	300 kVA / 240 kW
Standard power	330 kVA / 275 kW
Cylinder number	6
Piston diameter	126 X 155mm
Setting mode	Machine
Cooling	By water circuit
Start	12V Battery or ATS System
Combustion mode	Direct champer injection
Oil capacity	50L
Coolant liquid capacity	80L
Engine speed	1500rpm
Oil type	15W40
Compression ratio	17:1



MAIN CHARACTERISTICS

Model	AX-250
Rated voltage	400/230 V R
Power factor	0.8 (lag)
Rated power (Prime)	200kW / 250 kVA
Standby power (LTP)	220kW / 277,2kVA
Revolutions	1500 rpm
Rated current	360 AMP
Frequency	50 Hz
Sound power level	75 dB

ALTERNATOR

Power rating	200 kW
Voltage	400/230
Phases	3
Power factor	0.8 (lag)
Rated current	360 amp
Revolutions	1500 rpm
Frequency	50 Hz
Stamford class	Brushless

AVERAGE CONSUMPTION

At 100% RPM	56 L/H
At 75% RPM	42 L/H
At 50% RPM	28 L/H
Gas tank capacity	400 L

TYPE
STAMFORD
power generation



AX-250 PLUS STRONG

INTELLIGENT CONTROL PANEL

Monitor	LDC 132*64
Control languages (8)	English, spanish, french, etc.
Relay output	6
Mode	1P2W/2P3W/3P3W/3P4W
AC Frequency	50/60 Hz
USB interface	Available
Time test	Available
DC Working power range	DC(8-35)V
Installation measurements	186*141
Panel	Silca Gel
Input sockets	5
Analog input	3
AC Voltage travel	(15-360)V(ph-N)
Power/Current stop	Available
History and real time	Available
Maintenance function	Available
Measurements	209*166*44
Working temperature	(-25/+70)°C
GSM module remote start	Optional
ATS voltage drop module	Optional

DIMENSIONS AND WEIGHT

Length	3958 mm
Width	1280 mm
Height	2000 mm
Weight	3036 kg


CONTROL PANEL



- | | |
|------------------------|--------------------|
| 1. Alarm | 8. Up/Increase |
| 2. Status | 9. Home page/Back |
| 3. Normal network | 10. Adjust/Confirm |
| 4. Network closed/open | 11. Down/Decrease |
| 5. Load | 12. Automatic mode |
| 6. Group closed/open | 13. Start |
| 7. Normal generation | 14. Stop/Reset |
| | 15. Manual mode |



WEIGHT= 3036

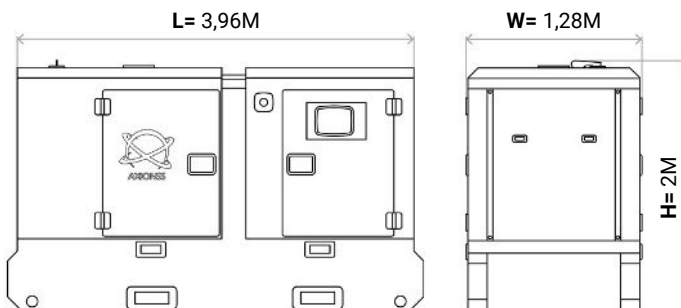

SWITCHBOARD ATS
(Optional)



PREHEATING SYSTEM
(Optional)



GSM MODULE
(Optional)



ALL GROUPS CAN BE CONVERTED TO SINGLE-PHASE

TECHNICAL SERVICE

Axionss has its own technical service. Our engineers and mechanics will go wherever you need to solve any doubt or incidence.

In Axionss we have a clear vocation of service to all our customers.



SPARE PARTS BANK

Axionss has a service of spare parts and replacements so that your genset has within 48h/ peninsula those parts you need.

If you have a genset of another brand, please contact us and we will help you.



WARRANTY

All our generator sets are covered by Axionss warranty for your peace of mind in the daily operation of your equipment.



FINANCING

Do you need financing for the purchase of your equipment?

Axionss has at your disposal a financing system through Renting for freelancers and companies.

With this system the amount requested will not be part of your credit history.

100% FINANCING



Avd. del Transporte, 55 y
57. Parque logístico.
El Cuervo de Sevilla.
CP: 41749. Sevilla
(ESPAÑA)

Tlf.: +34 854 85 61 75

info@axionss.com

www.axionss.com

